


BS-NBS

POWERED
BY NMTG
DRIVE
TECHNOLOGY



Model

This type of freewheel consists of an outer race and inner race with a sprag configuration and is bearing supported. Spring assembly ensures the contact of the sprags with both the outer and inner race, ensuring direct torque transmission once the torque arm engages when reverse rotation occurs.

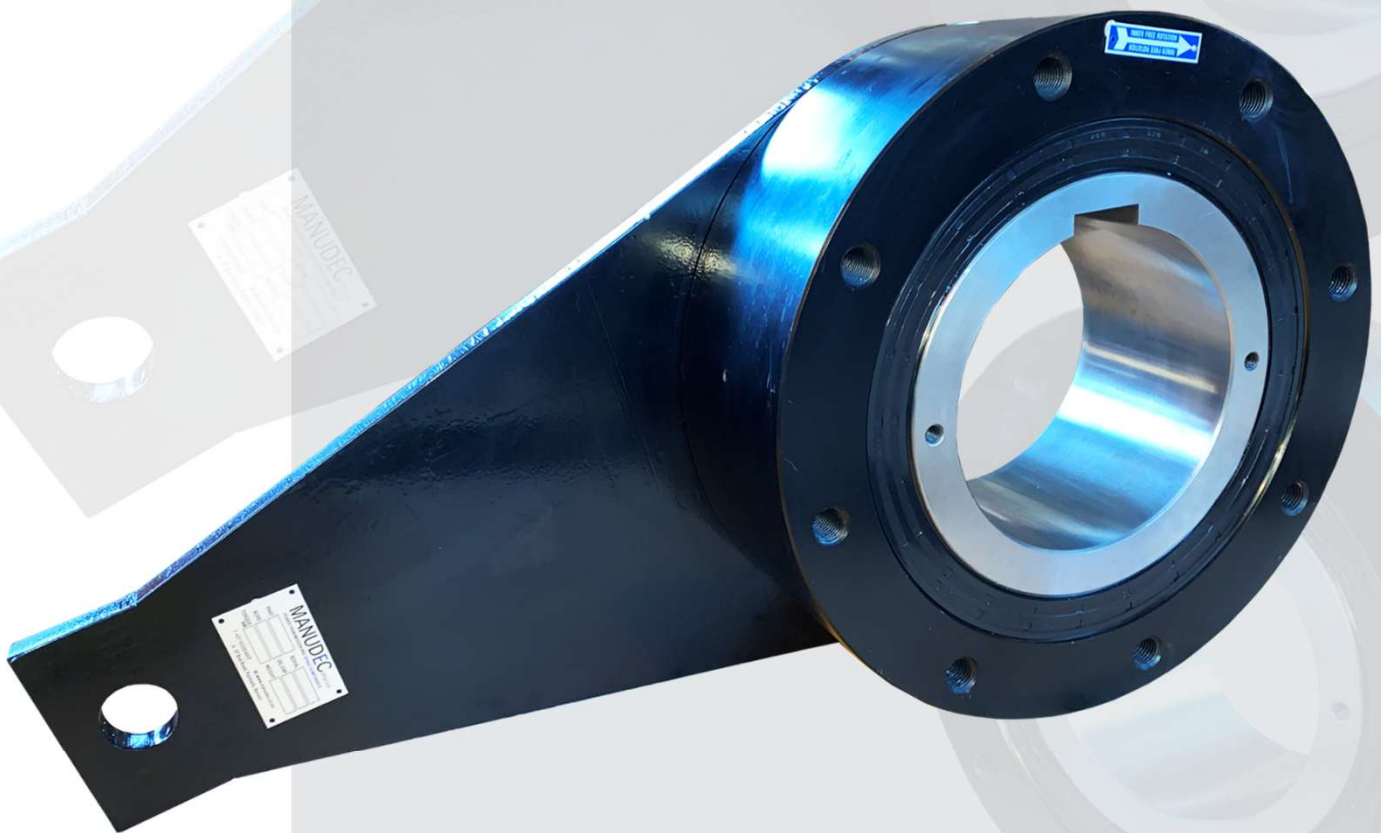

EXPERIENCE. EXPERTISE. EXCELLENCE.